

Mesh Back Task Stool

STEP 4
Attach Backrest “H” to the rear of mechanism with Backrest Screws “I”. NOTE: Fully tighten all screws.

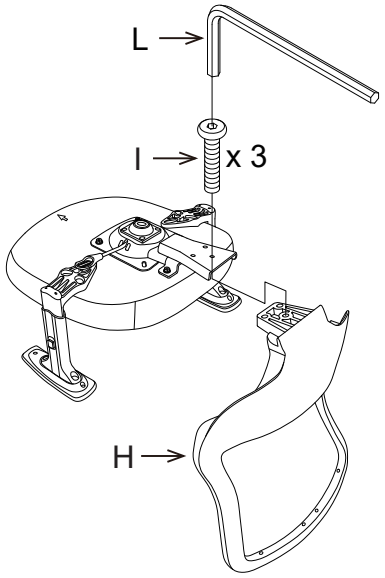

STEP 5
Place seat assembly onto Gas Lift “J”. Push firmly on the chair seat to securely attach seat assembly to seat post.

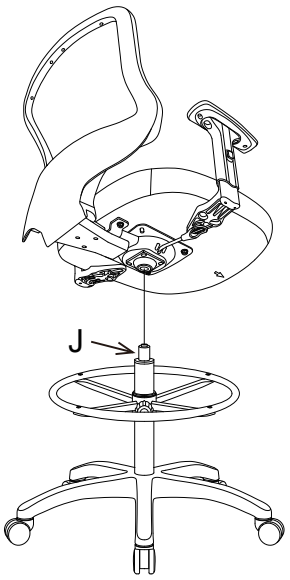


ARM HEIGHT ADJUSTMENT

To adjust arm height, push button (1) in to allow the arms to move up or down freely, release button (1) once the desired height is reached.

SEAT HEIGHT ADJUSTMENT

To raise seat height, remove pressure from the seat and lift handle (2). To lower seat height, sit on the chair and lift handle (2).

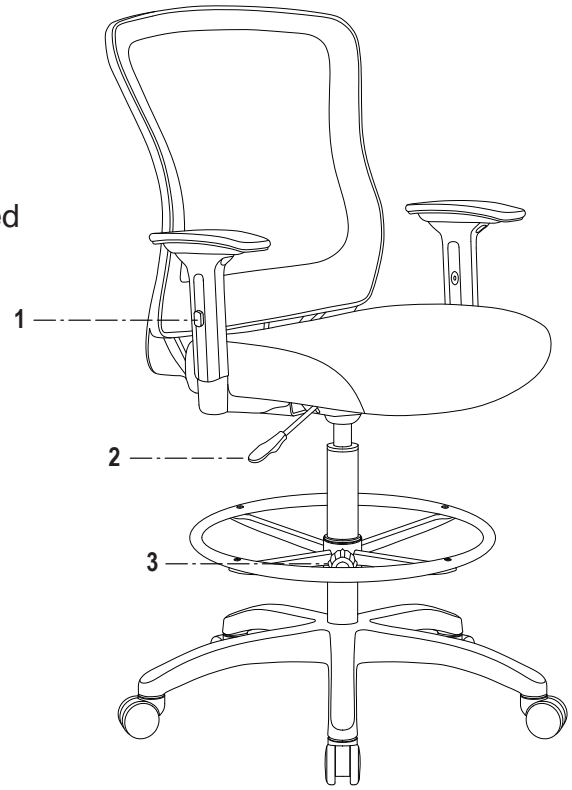

FOOTRING HEIGHT ADJUSTMENT

To adjust footring height, loosen the adjustment knob (3), adjust footring to desired height and then tighten the adjustment knob (3) completely to secure footring into position.

interior®

globalindustrial.com


1.800.645.1232

Assembly Instructions	Instrucciones de Ensamblaje	Directives d'assemblage
Customer Service US: 1-800-645-2986	Servicio de atención al Cliente US: 1-800-645-2986	Service à la clientèle Canada: 888-645-2986

Mesh Back Task Stool

Model: 695546
Model: 695547
Model: 695548
Model: 695964

Safety Information
ATTENTION: Make certain that all screws are fully tightened before using chair. Lubricate all moving parts and tighten all screws every 6 months or as needed.

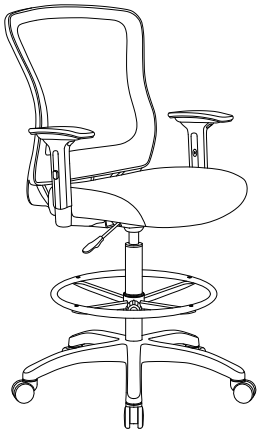


CONTENTS

Ref.	Qty.	Description
A	5	Casters
B	1	Base
C	1	Seat Cushion (With Mechanism Pre-installed)
D	1	Right Armrest
E	1	Left Armrest
F	6	Armrest Screws D 1/4" x L 1"
G	6	Washers
H	1	Backrest
I	3	Backrest Screws D 5/16" x L 1-9/16"
J	1	Gas Lift
K	1	Footring
L	1	Allen Wrench


STEP 1

Turn Base "B" upside down.
Insert Casters "A" into Base "B".

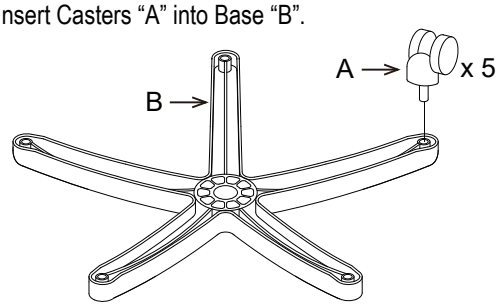

STEP 2

Slide Gas Lift "J" through Footring "K" and into Base "B".

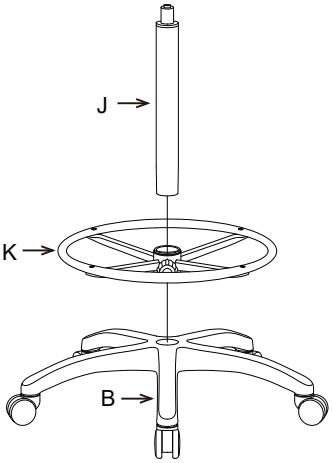

STEP 3

Attach Right Armrest "D" to Seat Cushion "C" with Armrest Screws "F" and Washers "G". Repeat for Left Armrest "E". NOTE: Arrows on armrests point to front of seat cushion and fully tighten all screws.

